

GET THE MOST AT THE LEAST

The RP3150STAR is ideal for your large and widespread business needs while being cost effective as well. It also has a widespread support network with call center service facilities. Now increase business without increasing costs thanks to this efficient yet economical model printer.



RP-3150 STAR Thermal Receipt Printer



Gray Scale Printing
Graphic printing with finer details



Auto-Cutter
1.5 million cuts; tear your bills neatly



Drop-in Paper Load
Effortless paper loading



Wall Mountable
Saves space on the desk

Standard features at a glance:

- Low noise, high speed (150 mm/s)
- Internal Buzzer
- Support paper saving function
- Choice of interface : Parallel / USB / Ethernet / Wi-fi

RP-3150 STAR

Thermal Receipt Printer

INNOVATING FOR INDIA

Print

Print method	Direct Thermal Line Printing
Resolution	180 DPI x 180 DPI
Print width	72mm (Max.)
Print speed	Maximum 150 mm/sec.
Memory	RAM: 2MB, FLASH: 2MB (Standard)
Sensors	Paper Near End Sensor, Paper End Sensor, TPH Position, TPH Over Heating Protection, Print Voltage
Drivers	Windows drivers: Win2000/XP/2003/VISTA/2008/Win7/Win8) Linux: CUPS, MAC
Interface	Optional Interface: Serial (RS-232), Parallel (IEEE1284), USB2.0, (Full Speed), Ethernet, WLAN (Wi-Fi)
Cash drawer control	1-2 cash drawers

Barcodes Fonts Graphics

Barcodes	1D: UPC-A, UPC-E, EAN-8, EAN-13, CODABAR, Code 39, Code 93, ITF, CODABAR 2D: PDF 417, QR, Maxicode, GS1
Fonts	Font A (12 x 24), Font B (9 x 17), Kanji Font A (24 x 24)
Character set	95 Alphanumeric, 13 types International Characters
Character modification	Rotate (0°, 90°, 180°, 270°), enlarge (1-6X), Emphasize, Underline and Reverse
Graphics printing	Bitmap Image Downloading and Direct Bitmap Image Print RAM Bitmap Download: Buffer Size 128KB, FLASH Bitmap Download: Buffer Size 512 KB

Paper

Paper type	Continuous Paper, Marked Paper
Paper thickness	0.06mm~0.1mm
Paper width	82.5 ± 0.5mm, 80 ± 0.5mm, 76 ± 0.5mm, 69.5 ± 0.5mm, 57 ± 0.5mm
Paper roll OD	Max 83mm
Paper cut	Full Cut, Partial Cut, Tear Off

Power supply

Input	100~240 VAC, 50~60 Hz
Output	24 ± 5%VDC, 2.0A

Reliability

Printer head lifetime	150 KM
Cutter lifetime	1,500,000 cuts (Full Cut, Paper Thickness: 0.07mm)
MCBF	60,000,000 lines
MTBF	360,000 hours

Environment


Operation conditions	5°C to 45°C, 20% to 93%RH (40°C)
Storage conditions	-40°C to 60°C, 20% to 93%RH (40°C)

Physical Specification

Dimensions	200mm(L) x 145mm(W) x 145mm(H)
Weight	Approximately 1.45kg



Application:

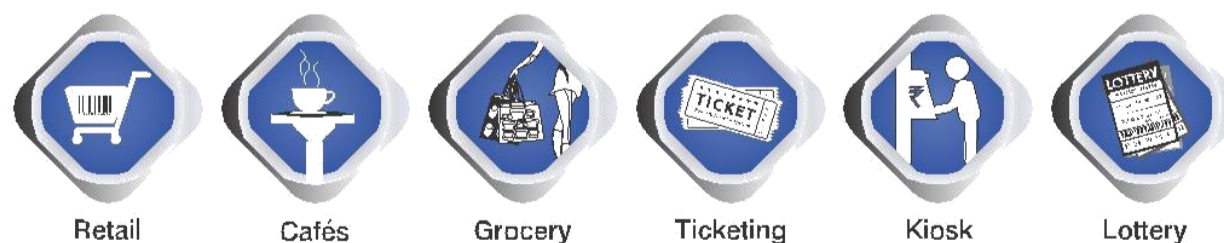

ORDERING INFORMATION

SKU Number	Item Description
3006210037	RP-3150 STAR (with Parallel Interface)
3006210036	RP-3150 STAR (with USB Interface)

OPTIONAL ACCESSORIES

2017140115	Parallel Interface card
2017140116	Ethernet Interface card
2017140117	Wi-Fi Interface card
2017140119	Serial Interface card